PCT

7 00;14:23

WORLD INTELLECTUAL PROPERTY ORGANIZATION INternational Bureau




(51) International Patent Classification 7: H04M 1/00	A2	(11) International Publication Number: WO 00/3839.
110-171 100	A	(43) International Publication Date: 29 June 2000 (29,06,00
(21) International Application Number: PCT/ZAS (22) International Filing Date: 15 December 1999 (3) (30) Priority Data: 98/11609 18 December 1998 (18.12.98) 98/11611 28 December 1998 (18.12.98) (71)(72) Applicant and Inventor: FOURIE, Louise [ZA] Buffalo Street, Vygeboom, 7550 Cape Town (ZA).	15.12.9 B) Z B) Z	BR, BY, CA, CH, CN, CU, CZ, DE, DK, RIS, ES, FI, GE GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KB, KC KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SI, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, FT, SE)
(74) Agent: NEL, Pierre, Hercules; 502 Tennessee Succ Glan, 0052 Protoria (ZA).		

BEST AVAILABLE COPY

(54) Title: MODULAR COMMUNICATION DEVICE INTERFACE

(57) Abstract

The present invention relates to communications device and a method of and system for apprending or expanding the service or functions of the device. Also included within the scope of the invention is a unique arrangement of multiple components around a modular structure allowing maximum flexibility and reliability. One or more electronic components link to at least one Processor housed in the main module or unit which in turn is connected or connectable to communication means for wireless broadcast and reception. Furthermore the unit includes medical applications including sensor and monitoring means to facilitate in recording of medical data of a user. Also the invention provides a structural layout to fit ergonomically around a user's arm or wrist and locking and unlocking means to secure and remove the device from the user's ann or wrist.

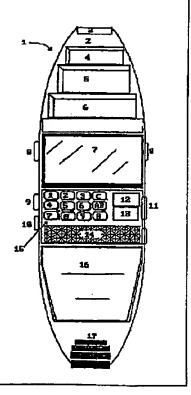

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES.	Spain	T,S	Lesothu	12	Slovenia
AM	Annesa	Ft	Pinland	LT	Lithungia	SK	Storakia
ДT	Austria	FR	Prance	LU	Luxembourg	SN	Senegal
AU	Australia '	GA	Gathou	LV	Latvia	8Z	Swariland
ΑZ	Azerbaijan	GB	United Kingdom	MC	Moneco	TD	Chad
BA	Bomis and Recognisins	GR	Georgia	MD	Republic of Mobiova	TG	Tingo
BB	Berbedos	GH	Clining	MG	Madagascar	TJ	Talikistan
8E	Belgium	GN	Guinea	MK	The former Yugaslay	TM	Trackmenisten
BF	Burkina Faso	GR	Greens		Republic of Macedonia	TR	Turbey
₽G	Bulgaria	KU	Hutigary	ML	Mali	TT	Trinidad and Totago
B.)	Benin	IE	ireland	MIN	Mongolia	UA	Ukraine
BR	Brazil	1L	Target	MR	Magritagia,	UG	Uganda
BY	Belarus	IS	Technid	MW	Malawi	US	United States of America
CA	Canada	lt	Italy	MCK	Moxico	uz	Usbokistan
CF	Central African Republic	JP	Japan	NE	Niger	VK	Viet Nam
CG	Congo	KE	Кепуа	NL	Netherlands	YU	Yugoslavia
CII	Switzerland	KG	Kyrgyzstan	NO	Norway	zw	Zimbahwe
a	Core d'Ivaire	KP	Democratic People's	NZ	New Zealand		
CM	Cameroon		Republic of Kores	PL	Poland		
CN	China	ECR.	Republic of Karea	PT	Portugal		
CU	Cubs	KZ.	Kozakstan	RO	Romania.		
Œ	Czech Republic .	LC	Saint Locis	RU	Rustian Federation		
DIE	Corning	니	Liccinenstein	S.D	Sudan		
DK	Dennate	LK	Sri Lanka	SE	Sweden		
BE	Batonia	LR	Liberia	8G	Singapore		

4/ 18

WO 00/3R393

PCT/ZA99/00142

OBJECTIVES OF THE INVENTION

Accordingly it is an object of the present invention to provide a device for interactive communication which is worn by a user around an arm or wrist with ungradable components to allow upgrading of the device and/or the expansion of its applications to medical censoring and monitoring. The ungradable components may also include or incorporate added features or functions or upgraded components forming part of the communications device. Traditional communications devices although innovatively designed never allowed it to be worn or by a user or be attached on an arm or wrist. Furthermore medical censoring and monitoring devices worn by users to read and record certain medical functionalities of a user has always been a tedious and uncomfortable experience. Accordingly it is an object of the invention to provide a communication device as well as a system for and method of upgrading and reading user medical data and with which the applicant believes disadvantages of known systems may at least be alleviated

20 .

WO 00/38393 PCT/ZA99/00142

MODULAR COMMUNICATION DEVICE INTERFACE

TECHNICAL FIELD

The present invention relates to a communications device in watch like arrangement with ungradable application modules for upgrading electronic components with variable functions and applications. The communications device is modified to be functionally attached to a limb of a user such as the wrist and arm. It is envisaged that the communications device may comprise a first unit modified to be functionally attached to the limb of a user and a second unit which includes a communications unit. The first unit serves as docking station or cradle for the second unit. Of coarse the application modules may be used in both the first and/or the second unit for the upgrading of applications and functions.

BACKGROUND ART

Traditional communication devices such as cellular phones are usually manufactured in a predetermined form and with predetermined functions. The present invention allows the communication device to be manufactured to fit ergonomically around a users arm or wrist in a watch like arrangement. Furthermore the device may be upgraded with censoring and measuring components for reading medical data of a user. Also features and/or functions of the phone may be altered or upgraded by inserting or removing modular applications or upgrading modules in the communications device.

15

'#" T"T

Fax Received: 07/07/2000 15:29 WORKSRV1 FAX3965FA6208DE * Pg 30/42 ; 23

WO 00/38393 PCT/ZA99/00142

DISCLOSURE OF INVENTION

According to a first aspect there is included an electrically powered communication device comprising communication means including a primary processor associated with wireless reception and -transmission means of modular configuration; and a secondary processor , matched with the primary processor , adapted to record and to store data in memory associated with the device.

According to a second aspect of the invention the communication device may comprise a series of inter-associated, multi-functional modular units.

10

20

The modular units may be selected from: medical monitoring units, general monitoring units, communication units recording units, memory units, externally functional units and power supply units.

According to a third aspect of the invention the communication device may be powered by a selection of: solar power, battery power and mains power.

Furthermore the communication device may comprising upgradable memory means and

7 17 7

77 10

WO 00/38393

PCT/ZA99/00142

the upgradable memory units may be housed in retaining means adapted to retain the

device to a predetermined object in use.

According to the fourth aspect of the invention the communication device may include

5 display means adapted to display at least the medical sensed data from an associated

sensor.

According to the fifth aspect of the invention the communication device may comprise

at least two components, the first bing adapted to be removably secured to a

10 predetermined object in use and the second being adapted to house communication means.

The first component may be adapted to serve as a docking station for the second

component so that both will be operatively functional.

15 According to a sixth aspect of the invention the communication device application

modules may be adapted to function in association with the first and second components

to upgrade its operational capabilities.

1.:

Of coarse the primary processor and the secondary processor may be the same processor

20

4

TT

7 00;14:28

PCT/ZA99/00142

BRIEF DESCRIPTION OF DRAWINGS

Preferred embodiments of the invention will now be described by means of non-limiting examples only, with reference to the accompanying diagrams wherein:

Figure 1 is an example of the invention in watch or wrist accessory format;

Figure 2 more specifically relates to the electronics of the unit or watch;

Figure 3 relates to the open and close position of the unit via the flexible/bendable links; and

Figure 4 illustrates exemplary embodiment of the working or mechanics of the attach and-release mechanism

9/ 18

WO 00/38393

PCT/ZA99/00142

BEST MODES FOR CARRYING OUT THE INVENTION

Turning to Figure 1 which is an example of the invention in watch or wrist accessory format (1) manufactured of flexible/bendable material (2) with a clip (3) for attachment of the unit around the arm of a user to the clip housing (17). The Invention includes bays or modular unit interfaces (4,5 and 6) for upgrading of the unit's functions or capabilities. Furthermore the unit may include display means (7) i.e. a LCD screen. Furthermore the unit may include release buttons (8) and volume buttons to either increase or decrease the communication volume (9 and 10). Also the unit may include communication means (11) with other electronic equipment via cable connection or via IR. Also the unit may be equipped with standard function or emergency keys (12 and 13) over and above the standard keypad (15). The unit may be powered by on or more of the following; rechargeable battery (16) and/or via Solar panels (14).

15

The back of the unit (18) may include a speaker (19) and microphone (24) for communication as well as medical monitoring modules or units (20, 21 and 23) for example for blood-pressure and heartbeat naming but a few. The modules may link or interface with the central processor (not shown) housed in the main unit (23).

20

.....

10/ 10

WO 00/38393 PCT/ZA99/00142

Figure 2 more specifically relates to the electronics of the unit or watch (25) including communication means with the one or more upgrading bays of units (26), a display device i.e. a LCD unit (27) a keypad (28) and a housing mechanism (29) for a remote communication link (30) including a microphone (31) and the speaker (32). Furthermore the invention may include a wireless communication port of unit i.e. an Infra Red unit (33). The preferred unit may be powered by solar energy (34) and/or via rechargeable battery (no shown) which may be located in the bay (35) with standardized clips (36). The unit (37) may include electronics for the speaker (38) and the microphone (47) which may be connected to the CPU (42). Also connected to the CPU (42) may be one or more of the following; communication means for the ungradable components (39), output means i.e. the display, (40), input means i.e. the keypad (41) and memory means (44). The electronic components may relay communication via the aerial (45) which may form part of the body or strap of the unit. The unit preferably includes electronics to accommodate the solar and/or battery power means (43) and the external communication means (46).

Figure 3 relates to the open (49) and close (50) position of the unit via the flexible/bendable links (49). The main unit with the display (51), keypad (54) and volume control keys (53) may be powered by solar (55) energy and/or via removable/rechargeable battery (56) which may be housed on the strap or side section (57) or on the cradle unit

7 00;14:28

WO 00/38393 PCT/ZA99/00142

(not shown). Also a speaker (58) and microphone (59) housed or located on the side sections or straps (60) with normal clips (67 and 68). Furthermore the invention includes the upgrading of the unit or the addition of application modules (61 to 64) for purposes such as memory upgrade, and medical sensors (65). The side section is flexible or bendable (66) to form around a users arm.

Figure 4 illustrates exemplary embodiment of the working or mechanics (81) of the attach - release mechanism(69) including for example a servo type unit (70) including a motor (71) and a shaft or servo arm (72) which is attached to the movable joint or segment (73) for manipulating the movement of the units. Alternatively the same may be accomplished by a spring loaded mechanism (74) with a release button or device (75) for releasing a tension unit (76) i.e. a spring. Furthermore a hydraulic unit (77) may be used including a pressurized container or cylinder (78) with a movable shaft 979) that is attached to the segment bendable/flexibly unit. All of the above may applied to the communications device as a single unit or when the invention comprises a first and second unit serving as cradle/docking device and the communication device (such as a cellular phone) respectively.

5

10

15

20

PCT/ZA99/00142

CLAIMS

- An electrically powered communication device comprising communication means including a primary processor associated with wireless reception and -transmission means of modular configuration; and a secondary processor, matched with the primary processor, adapted to record and to store data in memory associated with the device.
- A communication device as claimed in claim 1 comprising a series of interassociated, multi-functional modular units.
- A communication device as claimed in claim 1 or 2 including modular units selected from: medical monitoring units, general monitoring units, communication units recording units, memory units, externally functional units and power supply units.
- A communication device as claimed in claims 1 to 3 powered by a selection of: solar power, battery power and mains power.

9

7 00;14:28

¥ 13/ 18

WO 00/38393 PCT/ZA99/00142

A communication device as claimed in claim 4 comprising upgradable memory means.

- A communication device as claimed in claim 5 including upgradable memory units housed in retaining means adapted to retain the device to a predetermined object in use.
- A communication device as claimed in any one of the preceding claims including display means adapted to display at least the medical sensed data from an associated sensor.
- A communication device as claimed in any one of the preceding claims comprising at least two components, the first bing adapted to be removably secured to a predetermined object in use and the second being adapted to house communication means.
- 20 9 A communication device as claimed in claim 8 in which the first component is

... 1-4 --

PCT/ZA99/00142


WO 00/38393

adapted to serve as a docking station for the second component so that both will be operatively functional.

- A communication device as claimed in claims 9 and 10 including predetermined application modules adapted to function in association with the first and second components to upgrade its operational capabilities.
- 11 A communication device as claimed in claim 1 wherein the primary processor and
 10 the secondary processor is the same processor.


PCT/ZA99/00142

1/4

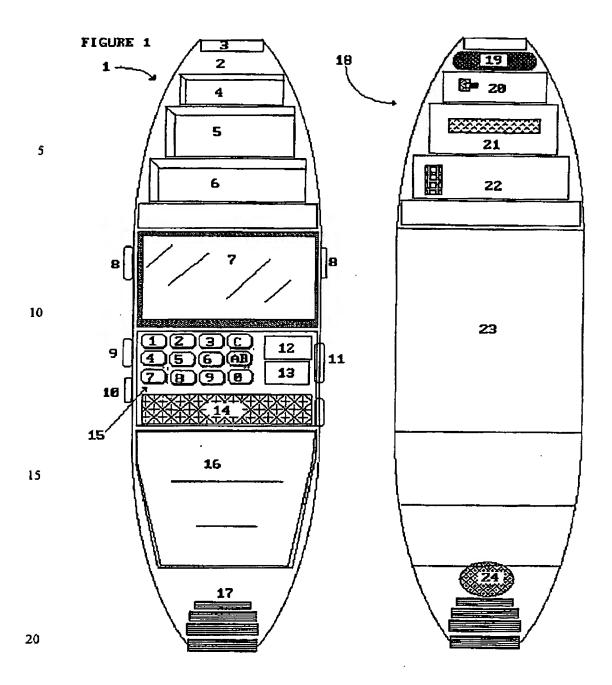


PCT/ZA99/00142

2/4

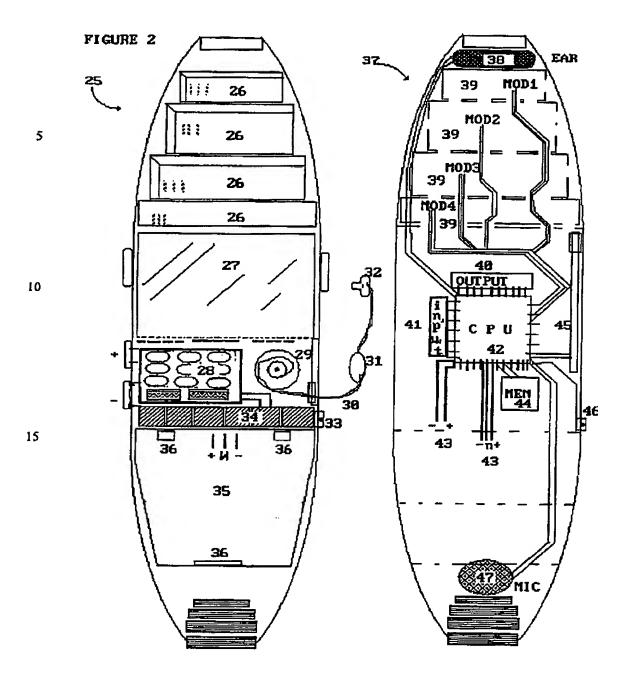


··· 4-·F···

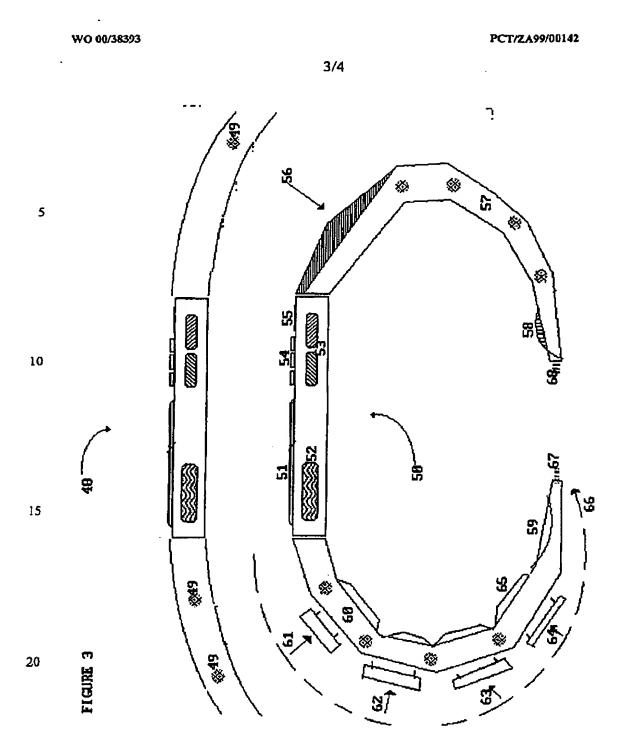

PCT/ZA99/00142

4/4

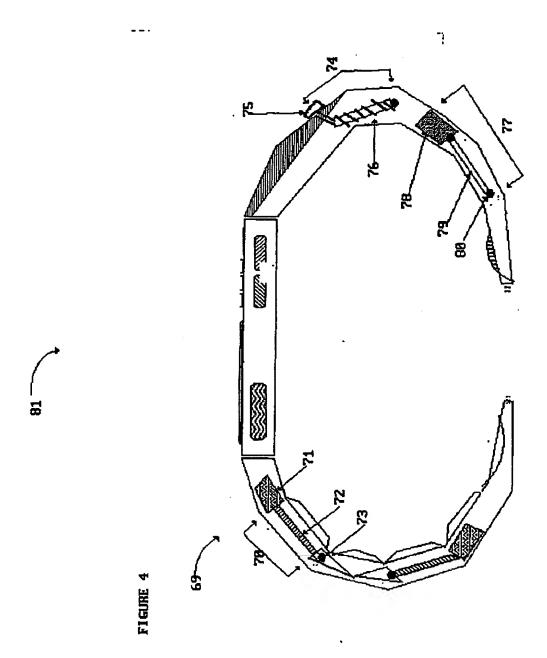

Ti

This Page is Inserted by IFW Indexing and Scanning Operations and is not part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

□ BLACK BORDERS
□ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
□ FADED TEXT OR DRAWING
□ BLURRED OR ILLEGIBLE TEXT OR DRAWING
□ SKEWED/SLANTED IMAGES
□ COLOR OR BLACK AND WHITE PHOTOGRAPHS
□ GRAY SCALE DOCUMENTS

IMAGES	ARE I	BEST	AVAIL	ABLE	COPY.

☐ LINES OR MARKS ON ORIGINAL DOCUMENT

□ OTHER: _____

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.

REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY